

Self-sharpening ceramic grain abrasives for high stock removal



Your application

Turbine blades

Tools

Tubes

Plants and containers

Coils, sheet metal

Sanitary fittings


Castings and forged parts

Medical instruments

VSM CERAMICS for maximum productivity

Your advantages at a glance

- > With VSM CERAMICS and VSM CERAMICS Plus VSM provides two innovative grain technologies suitable for specific applications
- A proven track record of up to 40 % increase in stock removal and service life as compared to conventional ceramic grain abrasives
- > Reduced temperature in the grinding zone due to the grinding-active additional layer: VSM TOP SIZE
- Significantly reduced chip adhesion is achieved with the new VSM ALU-X technology
- > VSM can be relied on to always deliver premium quality made in Germany

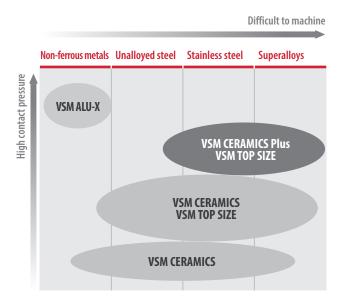

Premium quality thanks to preliminary products from our own production

Our high vertical integration enables us to achieve a consistently high quality of our abrasives. VSM develops and produces all the main preliminary products such as backing fabrics, resinoid bonds and abrasive grains itself at the Hanover site. This is how we can make a grain which is perfectly tailored to your requirements.

Producing our own preliminary products in-house is a special feature of VSM's abrasives production

Finishing of the backing materials

Resin production

Production of abrasive grain

Coating and spreading

Basic goods

Case studies

Centreless grinding



Grinding of dished ends




VSM CERAMICS	XK760X			
Workpiece	Tubes Outer diameter 104 mm			
Material	Chromium nickel steel (1.4301)			
Contact wheel	> 450 mm diameter> Hardness: 60° Shore A> Serration: 2:1			
Cutting speed	25 m/sec			
Axial feed rate	2.5 m/min			
Belt dimensions	150 × 3,500 mm			
Grit size	40			
Lubricant	Emulsion			
Outcome	 Increase in cutting performance per abrasive belt from 600 to 900 parts. Reduction in set-up costs. 			

VSM CERAMICS Plus	XK885Y
Workpiece	Tank bottoms
Material	Chromium nickel steel (1.4301)
Contact wheel	> 390 mm diameter> Hardness: 80° Shore A> Serration: 10:8
Cutting speed	29.5 m/sec
Rotation speed	Manual
Belt dimensions	60 × 2,175 mm
Grit size	20
Lubricant	None
Outcome	> 100 % increase in the number of machined workpieces.

VSM CERAMICS abrasives for demanding grinding tasks


VSM CERAMICS Plus (CER Plus)

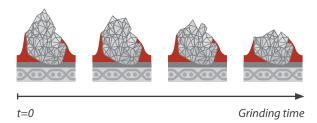

VSM CERAMICS Plus grains feature an improved self-sharpening effect when machining high-alloyed steels and super alloys, which are materials that require high contact pressure.


The unique structure of **VSM CERAMICS Plus** microcrystals enables a much more subtle breaking down of the grain and produces much sharper edges. This in turn leads to lower temperatures in the contact area and an extended service life.

VSM CERAMICS (CER)

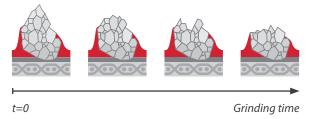

VSM CERAMICS grains achieve optimum stock removal. They are the top products for a large number of stationary and mobile grinding applications. **VSM CERAMICS** also have an excellent price-performance ratio.

VSM grinding-active additional layers

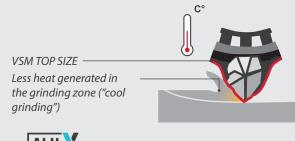

NEW



VSM ALU-X

VSM TOP SIZE is recommended for dry machining heat-resistant stainless steels and non-ferrous metals. The grinding-active additional layer improves the cutting performance whilst reducing the temperature in the contact zone. This significantly extends the service life of the abrasive.

The new **VSM ALU-X** additional layer reduces chip adhesion and thus reduces clogging of the abrasive. The service life is assured and extended so that excellent stock removal is achieved even after longer periods of use.



VSM CERAMICS

			O	1				Stock removal Surface	!
	Rolls (max. width)	Wide belts	Narrow belts	Discs	Backings	Grain type	Features	20 20 20 20 20 20 20 20 20 20 20 20 20 2	VSM series
	1480	•	•	i	Cloth	VSM CERAMICS Plus	▼ TOP SIZE, ◊		XK885Y
	1480	•	•		Cloth	VSM CERAMICS Plus	▼ TOP SIZE, ◊		XK880Y
NEW	1480	•	•		Cloth	VSM CERAMICS Plus	٥		XK785Y
	1480	•	•		Cloth	VSM CERAMICS	▼ TOP SIZE, ◊		XK888Z
	1480	•	•		Cloth	VSM CERAMICS	▼ TOP SIZE, ◊		XK877Z
	1480	•			Cloth	VSM CERAMICS	▼ TOP SIZE, ◊		XK870Y
	1480	•	•		Cloth	VSM CERAMICS	▼ TOP SIZE, ◊		XK875X
	1480	•	•		Cloth	VSM CERAMICS	▼ TOP SIZE, ◊		XK870X
	1480/1050			•	Cloth	VSM CERAMICS	▼ TOP SIZE, velour-backed		XK870K
	1480	•	•		Cloth	VSM CERAMICS	▼ TOP SIZE, ◊		XK850X
	1480		•		Cloth	VSM CERAMICS	▼ TOP SIZE		XK870T
	1480	•	•		Cloth	VSM CERAMICS	▼ TOP SIZE, ◊		XK870J
	1480/1050		•		Cloth	VSM CERAMICS	▼ TOP SIZE		XK870F
	1480			•	Cloth	VSM CERAMICS	▼ TOP SIZE, velour-backed		XL870F
	1480		•		Cloth	VSM CERAMICS	ALU-X, O		XK733X
	1480	•	•		Cloth	VSM CERAMICS	8		XK760Y
	1480	•	•		Cloth	VSM CERAMICS	8		XK760X
	1480			•	Cloth	VSM CERAMICS	velour-backed		XK760K
	1470			•	Fibre	VSM CERAMICS Plus	▼ TOP SIZE		XF885
	1470			•	Fibre	VSM CERAMICS	▼ TOP SIZE		XF870
	1470			•	Fibre	VSM CERAMICS	▼ TOP SIZE		XF850
NEW	1470			0	Fibre	VSM CERAMICS	ALU-X		XF733
	1470			•	Fibre	VSM CERAMICS			XF760
	1450	•	•		Paper	VSM CERAMICS Plus			XP780

Legend:

O for low to medium contact pressure

- ⊙ for medium contact pressure
- for medium to high contact pressure
- ♦ also suitable for wet applications

▼ TOP SIZE

Grinding-active additional layer reduces the temperature in the grinding zone



The combination of VSM CERAMICS and ALU-X significantly reduces chip adhesion

velour-backed products with a velour backing

Flexibility of the backing material (last letter of the series name):

- **F** very flexible
- **J** flexible
- **T** semi-sturdy
- **X** sturdy
- Y very sturdy
- **Z** extremely sturdy

Last revised: 11/2020



VSM stands for competence, quality and customer orientation

Very few others understand grinding processes like we do. Not only do we grind every surface to precision, we also analyse the specific grinding applications of our customers so that we can always find the best, long-term solution. Process-related expertise is one of the distinguishing features of VSM.

We know abrasives

Because we understand them. VSM develops and produces all the main preliminary products such as backing fabrics, resinoid bonds and abrasive grains at its Hanover site. By doing so, we fulfil our high, self-imposed requirements in industry, the commercial and trade sector. The continuous development of further grain compositions, their refinement and processing ensures that VSM remains one of the most experienced manufacturers of ceramic grain worldwide.

Application-based expertise

We see the entire grinding processes of our customers as a challenge. A global network of VSM specialists provides expert advice wherever it is needed

irrespective of whether your company is large or small. Thanks to our close collaboration with machine manufacturers, cutting fluid experts and research institutes, we ensure that our customers can benefit from technological trends as soon as possible.

We make our expertise available for you

The VSM Technical Center (TC) in Hanover provides an opportunity for product training, seminars and extensive application tests. Customer applications can be adjusted and results reviewed. This service from VSM reduces downtimes and productivity losses for our customers.

Certified and recognized worldwide

VSM has been certified to ISO standard 9001:2008 as its basis for quality assurance for many years. In addition, it is a member of FEPA, oSa and the German Abrasives Association (VDS).







A worldwide leader in abrasives.



Germany (Headquarters)

VSM · Vereinigte Schmirgelund Maschinen-Fabriken AG Siegmundstraße 17 30165 Hannover

30165 Hannover T +49 511 3526 478 www.vsmabrasives.de

Hungary

VSM Abrasives Hungary Ltd.

Leshegy út 31 2310 Szigetszentmiklós T + 36 24 519223 www.vsmabrasives.hu

Sweden

PFERD-VSM AB

Stockholmsvägen 18, 7 tr 18150 Lidingö T +46 8 5647 2300 www.pferd-vsm.se Czech Republic

VSM Abrasives s.r.o. River Garden, 5th Floor Rohanské nábřeží 678/23 18600 Praha T +420 277 015 300 www.vsmabrasives.cz

Poland

PFERD-VSM Sp. z o.o.

Ul. Polna 1A 62-025 Kostrzyn Wielkopolski T +48 61 8970 480 www.pferdvsm.pl

Switzerland

PFERD-VSM (Schweiz) AG

Zürichstr. 38 B 8306 Brüttisellen T +41 44 805 2828 www.pferd-vsm.ch France

VSM Impavide S.A.S.

52 Avenue Marcel Paul 93297 Tremblay en France T +33 1 4151 0300 www.vsmabrasives.fr

Russia

VSM AG · Russian Representative Office

141006, Moscow region c. Mytishchi Volkovskoe roadway vl. 5a, str. 1, of. 208 T +7 499 346 35 27 www.vsmabrasives.ru

Turkey

STARCKE VSM VITEX Zimpara Teknolojisi Sanayi ve Dis Ticaret Ltd. Sti.

AYOSB Gazi Bulvari 8. Sokak No: 5 Tuzla Istanbul T +90 216 591 06 17 T +90 216 591 07 01 www.starckevsm.com Great Britain

VSM Abrasives Ltd.

Unit 5, Joplin Court Sovereign Business Park, Crownhill Milton Keynes, MK8 0JP T +44 19 0831 0207 www.vsmabrasives.co.uk

Spain

VSM·VITEX ABRASIVOS IBERICA, S.A.U.

Ctra. de Molins de Rei, 79A, Nave 8 08191 Rubí (Barcelona) T+34 93 697 3411 www.vsmabrasives.es

Americas

Canada

VSM Abrasives Canada Inc.

2425 Wyecroft Road Unit #1 Oakville, Ontario L6L 6R5 T +1 905 827 0005 www.vsmabrasives.ca Latin America

VSM Latinoamérica S.A.S.

Carrera 9 No. 115 – 06 Edificio Tierra Firme Piso 17 Bogota, Colombia T +57 1 639 8489 M +57 316 8311705 www.vsmabrasiveslatinamerica.com China

Asia

VSM Abrasives (China)

Rooms 203/205, Building C, No. 38, Xuxiang Road, Qingpu District, Shanghai, P.R. China Postal Code: 201702 T +86 21 5976 2011 www.vsmabrasives.com.cn Thailand

VSM Abrasives Asia Pacific

Thailand Representative Office

444 Olympia Thai Tower, 13th FL Ratchadaphisek Rd., Samsennok Huay Kwang, Bangkok 10310 T +66 2 513 7441 www.vsmabrasives-apac.com

USA

VSM Abrasives Corp.

1012 East Wabash St. O'Fallon, Mo. 63366 T +1 636 272 7432 us.vsmabrasives.com



Visit our website at www.vsmabrasives.com

VSM is a registered trademark of VSM · Vereinigte Schmirgel- und Maschinen-Fabriken AG, Ha Sublact to technical change, VSM · D/CFR/06 WM//11 23 /an/1