

CYLINDRICAL GRINDING

**Grinding of tubes, pipes
and other cylindrical parts**

VSM – Your specialist for cylindrical grinding

Benefit from VSM's high-performing abrasives:

- > High stock removal per time unit
- > Extended service life and low set-up costs as a result
- > Consistent and reproducible surface finishes
- > Defined scratch patterns, roughness and gloss value
- > **VSM TOP SIZE** products achieve:
 - > Enhanced machining capacity
 - > A reduced temperature in the grinding area and because of this structural changes are avoided

With VSM you can rely on receiving:

- > High-performance products made in Germany
- > On-site application-based advice
- > Reliable delivery performance
- > Analyses of problems and preliminary tests in the VSM Technical Center
- > Expertise based on co-operating with more than 60 machine manufacturers worldwide
- > A global distribution network with subsidiaries and partners in more than 70 countries

Your application

Tubes



Piston rods



Cylinders



Furniture



Architecture



Containers



VSM grain technologies in the spotlight


Top grain technologies for high stock removal rates

VSM ACTIROX



- > **Geometrically formed ceramic grain**
- > Maximum stock removal and a faster cut for superalloys and stainless steels
- > Cool grinding extends the service life thanks to VSM TOP SIZE

VSM CERAMICS Plus · (CER Plus)



- > **Optimised self-sharpening effect** when processing high-alloyed steels ensures very high stock removal rates
- > Reduced temperature in the contact area
- > Significantly extended service life

VSM CERAMICS · (CER)



- > Top product with **self-sharpening effect** for processing non-alloyed steels and stainless steels
- > High removal rate
- > Cool grinding allows longer contact times

Top grain technologies for perfect surface finishes

VSM ILUMERON




- > **Full faced coated long-term abrasive** with special bonding
- > For fine and consistent surfaces with high gloss levels
- > Developed primarily for processing stainless steels, superalloys and non-alloyed steels

VSM COMPACTGRAIN Plus · (COM Plus)



- > **Long-term abrasive** that wears uniformly down to the backing material and achieves a consistent surface finish
- > Optimised reserve grain capacity
- > Improved bonding properties
- > Continuous self-sharpening thanks to the granulate structure


VSM COMPACTGRAIN · (COM)



- > **Long-term abrasive** achieves reproducible surface finishes and consistent roughness
- > Uniform stock removal
- > Continuous self-sharpening thanks to the granulate structure

VSM grinding-active additional layers

VSM TOP SIZE
Less heat generated in the grinding zone ("cool grinding")




VSM TOP SIZE is recommended for dry machining heat-resistant stainless steels and non-ferrous metals. The grinding-active additional layer improves the cutting performance whilst reducing the temperature in the contact zone. This significantly extends the service life of the abrasive.

The new **VSM ALU-X** additional layer reduces chip adhesion and thus reduces clogging of the abrasive. The service life is assured and extended so that excellent stock removal is achieved even after longer periods of use.

NEW

ALU-X



VSM ALU-X

Grinding of tubes and bars



Grinding of longitudinally welded tubes



Centerless grinding of tubes and bars



Cylindrical grinding of tubes and bars using hand-held machines

Wire grinding



Wire descaling



Grinding of cylindrically-shaped workpieces



Cylindrical grinding of piston rods and cylinders and grinding between centres



Cylindrical grinding of rollers during roller pass

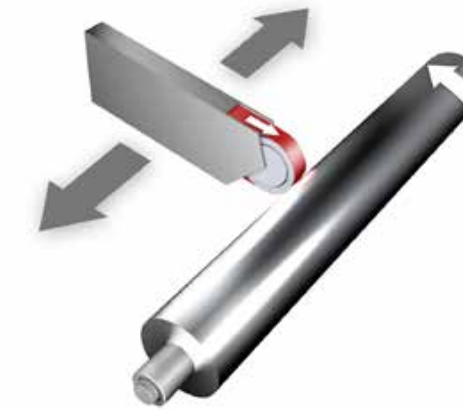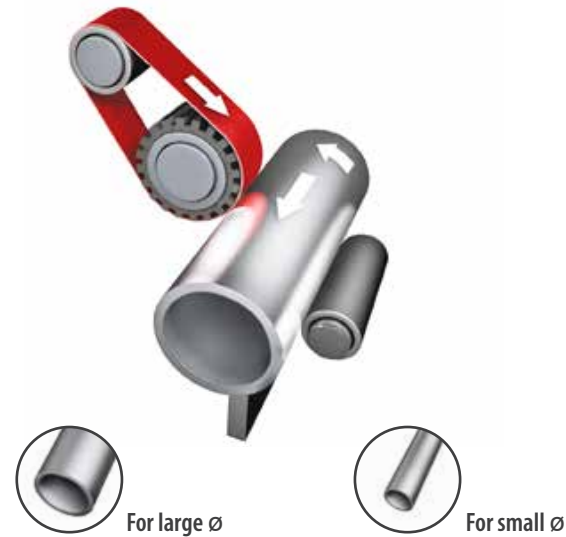

Recommended products

VSM series	Grain type	Grit size
XK885Y	CER Plus	20-120
XK850X	CER	36-80, 120
KK815Y	ZA	36-100
ZK713X	ZA/AO	24-320
XK789X	COM (CER)	40, 60, 80
KK791Y	COM Plus (AO)	60-800
KK718X	COM (AO)	60-600
CK748X	COM (SIC)	80-400
CK772T	COM (SIC)	120-1200

Recommended products

VSM series	Grain type	Grit size
XK880Y	CER Plus	20-120
XK785Y	CER Plus	36-120
XK760X	CER	24-120
ZK713X	ZA/AO	24-320
XK786X	COM (CER)	60, 80, 120
KK791Y	COM Plus (AO)	60-600
KK718X	COM (AO)	60-600
KK712X	COM (AO)	80-600
CK748X	COM (SIC)	80-400
CK772T	COM (SIC)	120-1200
RK700X	AO	80, 180-1200
CK917C	CORK (SIC)	320-800, 1200
KV710X	Non-woven (AO/SIC)	coarse-ultra fine

Recommended products

VSM series	Grain type	Grit size
XK880Y	CER Plus	20-120
XK785Y	CER Plus	36-120
XK760X	CER	24-120
ZK744X	ZA	36-80
XK789X	COM (CER)	60, 80
KK712X	COM (AO)	80-600
CK748X	COM (SIC)	80-400
CK918X	COM (SIC)	240-1200
CK917C	CORK (SIC)	320-800, 1200
KV710X	Non-woven (AO/SIC)	coarse-ultra fine

Recommended products

VSM series	Grain type	Grit size
XK885T	CER Plus	36, 40, 60, 80, 120
XK870X	CER	24-120
XK850X	CER	36-80, 120
XK870F	CER/AO	60-400
ZK713X	ZA	24-320
KK772J	COM (AO)	80-1200
CK772T	COM (SIC)	120-1200
KK711T	AO	50-500
CK721X	SIC	24-600
KV710X	Non-woven (AO/SIC)	coarse-ultra fine

Recommended products

VSM series	Grain type	Grit size
XK885Y	CER Plus	20-120
XK785Y	CER Plus	36-120
XK870X	CER	24-120
XK760X	CER	24-120
KK815Y	ZA	36-100
KK715X	ZA	24-80
ZK713X	ZA/AO	24-320
KK790Y	COM Plus (AO)	60-600
KK791Y	COM Plus (AO)	60-600
KK718X	COM (AO)	60-600
KK834X	COM (AO)	80-240
CK748X	COM (SIC)	80-400

Recommended products

VSM series	Grain type	Grit size
DA930X	DA	46, 64, 91, 126, 251, 357 (µm)
XK885Y	CER Plus	20-120
XK785Y	CER Plus	36-120
XK760X	CER	24-120
ZK713X	ZA	24-320
XK786X	COM (CER)	60, 80, 120
KK790Y	COM Plus (AO)	60-600
KK791Y	COM Plus (AO)	60-600
KK718X	COM (AO)	60-600
KK712X	COM (AO)	80-600
CK748X	COM (SIC)	80-400
CK772T	COM (SIC)	120-1200
RK700X	AO	80, 180-1200
KV710X	Non-woven (AO/SIC)	coarse-ultra fine

Recommended products

VSM series	Grain type	Grit size
DA930X	DA	46, 64, 91, 126, 251, 357 (µm)
XK885Y	CER Plus	20-120
XK785Y	CER Plus	36-120
XK850X	CER	36-80, 120
XK760X	CER	24-120
ZK744X	ZA	36-80
XK789X	COM-CER	40, 60, 80
KK790Y	COM Plus (AO)	60-600
KK791Y	COM Plus (AO)	60-600
CK748X	COM-SIC	80-400
CK918X	COM-SIC	240-1200
RK700X	AO	80, 180-1200
KV710X	Non-woven (AO/SIC)	coarse-ultra fine

Legend


DA	VSM DIAMOND	COM (CER)	VSM COMPACTGRAIN CERAMICS	SIC	VSM SILICON CARBIDE
CER Plus	VSM CERAMICS Plus	COM (AO)	VSM COMPACTGRAIN ALUMINIUM OXIDE	Non-woven (AO)	VSM NON-WOVEN ALUMINIUM OXIDE
CER	VSM CERAMICS	COM (SIC)	VSM COMPACTGRAIN SILICON CARBIDE	Non-woven (SIC)	VSM NON-WOVEN SILICON CARBIDE
ZA	VSM ZIRCONIA ALUMINA	AO	VSM ALUMINIUM OXIDE	CORK (SIC)	VSM CORK SILICON CARBIDE

Flexibility of the backing material (last letter of the series name):

E extremely flexible	J flexible	X sturdy
F very flexible	T semi-sturdy	Y very sturdy

Z extremely sturdy

Grinding parameters

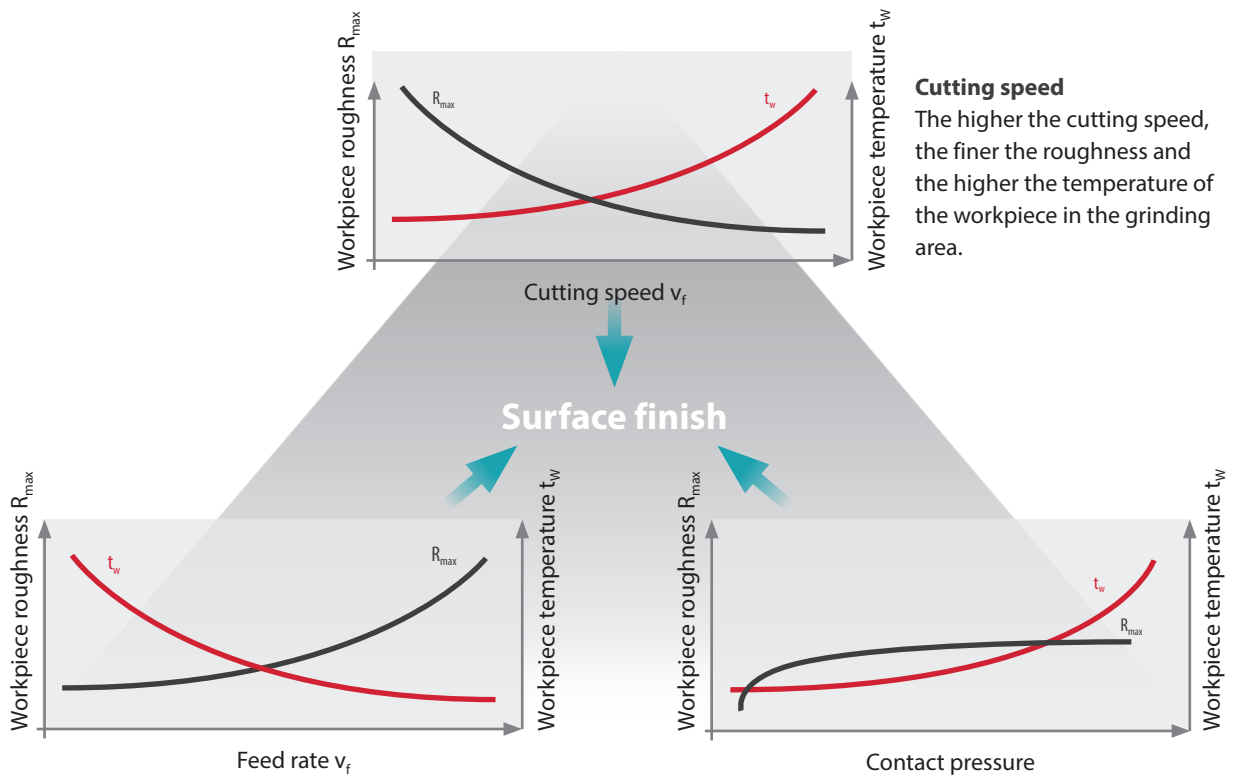



Feed rate

The higher the feed rate, the deeper the roughness, and the lower the temperature of the workpiece in the grinding area.

Contact pressure

The higher the contact pressure, the higher the temperature of the workpiece because of the penetration of the abrasive grains into the workpiece. There is hardly any change in the roughness of the workpiece.

F_p = Contact pressure
 v_c = Cutting speed
 h = Chip thickness

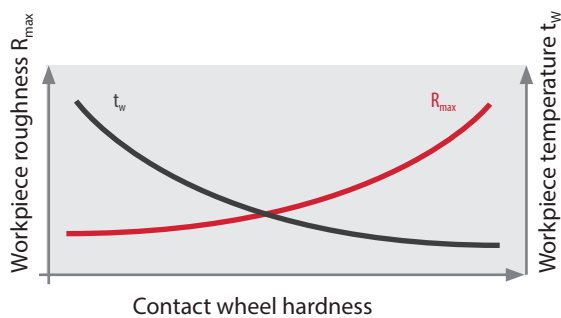

Contact wheel hardness

The harder the contact wheel, the deeper the roughness and the lower the temperature of the workpiece in the grinding area.



Surface Type (coating)
 metal, rubber, synthetic material
Hardness °Shore A
Serration shape, land to groove ratio
Metal body

A worldwide leader in abrasives.



Europe

Germany (Headquarters)

VSM · Vereinigte Schmirgel- und Maschinen-Fabriken AG
Siegmundstraße 17
30165 Hannover
T +49 511 3526 478
www.vsmabrasives.de

Czech Republic

VSM Abrasives s.r.o.
River Garden, 5th Floor
Rohanské nábřeží 678/23
18600 Praha
T +420 277 015 300
www.vsmabrasives.cz

France

VSM Impavide S.A.S.
52 Avenue Marcel Paul
93297 Tremblay en France
T +33 1 4151 0300
www.vsmabrasives.fr

Great Britain

VSM Abrasives Ltd.
Unit 5, Joplin Court Sovereign
Business Park, Crownhill
Milton Keynes, MK8 0JP
T +44 19 0831 0207
www.vsmabrasives.co.uk

Hungary

VSM Abrasives Hungary Ltd.
Leshegy út 31
2310 Szigetszentmiklós
T +36 24 519223
www.vsmabrasives.hu

Poland

PFERD-VSM Sp. z o.o.
Ul. Polna 1A
62-025 Kostrzyn Wielkopolski
T +48 61 8970 480
www.pferdvsmlp

Russia

VSM AG · Russian Representative Office
141006, Moscow region
c. Mytishchi Volkovskoe
roadway vl. 5a, str. 1, of. 208
T +7 499 346 35 27
www.vsmabrasives.ru

Spain

VSM · VITEX ABRASIVOS IBERICA, S.A.U.
Ctra. de Molins de Rei,
79A, Nave 8
08191 Rubí (Barcelona)
T +34 93 697 3411
www.vsmabrasives.es

Sweden

PFERD-VSM AB
Stockholmsvägen 18, 7 tr
18150 Lidingö
T +46 8 5647 2300
www.pferd-vsm.se

Switzerland

PFERD-VSM (Schweiz) AG
Zürichstr. 38 B
8306 Brüttsellen
T +41 44 805 2828
www.pferd-vsm.ch

Turkey

STARCKE VSM VITEX Zimpara Teknolojisi Sanayi ve Dis Ticaret Ltd. Sti.
AYOSB Gazi Bulvari 8.
Sokak No: 5
Tuzla Istanbul
T +90 216 591 06 17
T +90 216 591 07 01
www.starckevsm.com

Americas

Canada

VSM Abrasives Canada Inc.
2425 Wyecroft Road Unit #1
Oakville, Ontario
L6L 6R5
T +1 905 827 0005
www.vsmabrasives.ca

Latin America

VSM Latinoamérica S.A.S.
Carrera 9 No. 115-06
Edificio Tierra Firme Piso 17
Bogota, Colombia
T +57 1 639 8489
M +57 316 8311705
www.vsmabrasives-
latinamerica.com

Asia

China

VSM Abrasives (China) Co. Ltd.
Rooms 203/205, Building C,
No. 38, Xuxiang Road, Qingpu
District, Shanghai, P.R. China
Postal Code: 201702
T +86 21 5976 2011
www.vsmabrasives.com.cn

Thailand

VSM Abrasives Asia Pacific Pte. Ltd.
Thailand Representative Office
444 Olympia Thai Tower, 13th FL
Ratchadaphisek Rd., Samsennok
Huay Kwang, Bangkok 10310
T +66 2 513 7441
www.vsmabrasives-apac.com

USA

VSM Abrasives Corp.
1012 East Wabash St.
O'Fallon, Mo. 63366
T +1 636 272 7432
us.vsmabrasives.com



Visit our website at
www.vsmabrasives.com