

# AF799



## VSM ACTIROX

<b>Grain type</b>	Ceramic
<b>Bonding</b>	Full-resin bonded
<b>Colour</b>	Dark Petrol
<b>Backing</b>	Vulcanised fibre
<b>Production width</b>	1,470 mm

### Materials



Unalloyed steel



Stainless Steel



Aluminium



Non-ferrous metal

### Features



Medium to high pressure




Medium dose coated

## ACTIROX

The geometrically shaped ceramic grain generates maximum stock removal when machining unalloyed steel. A fast cut and an extremely long service life lead to a significant increase in productivity.


### Grit sizes:



## Benefits

- > Maximum stock removal thanks to geometrically shaped ceramic grain leads to a reduction in operating costs
- > More than twice as much stock removal compared to conventional ceramic grain abrasives
- > Increase in productivity: More workpieces per unit of time due to fast cutting
- > Extremely stable dimensions and a durable vulcanized backing satisfy the highest safety requirements

## Grain technology

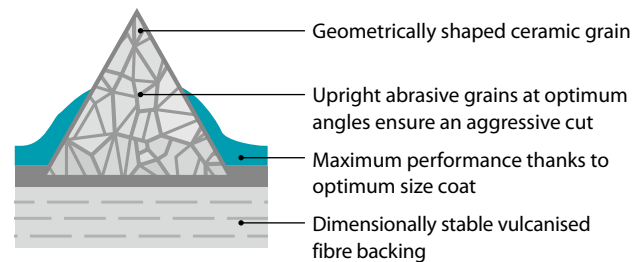

## VSM · Vereinigte Schmirgel- und Maschinen-Fabriken AG

Siegmundstraße 17 · 30165 Hannover · Germany  
T +49 511 3526 0 · F +49 511 3521 315  
sales@vsmabrasives.com · [www.vsmabrasives.com](http://www.vsmabrasives.com)

