

AF799



 Made in Germany

VSM ACTIROX

Grain type	Ceramic
Bonding	Full-resin bonded
Colour	Dark Petrol
Backing	Vulcanised fibre
Production width	1,470 mm

Materials



Unalloyed steel



Stainless Steel



Aluminium



Non-ferrous metal

Features




Medium to high pressure



Medium dose coated

The geometrically shaped ceramic grain generates maximum stock removal when machining unalloyed steel. A fast cut and an extremely long service life lead to a significant increase in productivity.


Grit sizes:¹⁾



Benefits

- > Maximum stock removal thanks to geometrically shaped ceramic grain leads to a reduction in operating costs
- > More than twice as much stock removal compared to conventional ceramic grain abrasives
- > Increase in productivity: More workpieces per unit of time due to fast cutting
- > Extremely stable dimensions and a durable vulcanized backing satisfy the highest safety requirements

Grain technology

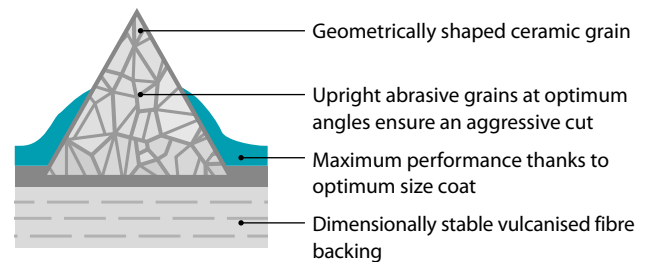

VSM · Vereinigte Schmirgel- und Maschinen-Fabriken AG

Siegmundstraße 17 · 30165 Hanover · Germany
T +49 511 3526 479 · F +49 511 3521 315
sales@vsmabrasives.com · www.vsmabrasives.com



¹⁾ Further grit sizes upon request. Subject to technical changes.