# KK772K




## VSM COMPACTGRAIN

*)

| | |
|---|---|
| **Grain type** | Aluminium oxide granulate |
| **Bonding** | Full-resin bonded |
| **Colour** | Grey |
| **Backing** | J-Polyester |
| **Flexibility** | Flexible |
| **Production width** | 1,090 mm |

**Materials**

**Features**

Compact-grain velour disc with grain reserves made of aluminium oxide that wear down easily, for continuous self-sharpening with low contact pressure. Thanks to its wide grit-size spectrum, KK772K is suitable for many areas of application, from rough to fine grinding. Achieves constant stock removal and uniform surfaces over its entire, very long service life.

*) designed for use with VSM back-up pad ZKLF for low and medium speed angle grinders.

**Grit range:**[1)]

| 16 | 20 | 24 | 30 | 36 | 40 | 50 | 60 | 80 | 100 | 120 | 150 | 180 | 220 | 240 | 280 | 320 | 360 | 400 | 500 | 600 | 800 | 1000 | 1200 |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | | | | | | | P | | P | | P | | P | | P | | P | | P | | | |

## Benefits

- Long-term abrasive with continual self-sharpening effect achieves extremely long service life
- Reduction of grinding costs through lower tool consumption and fewer tool changes
- For uniform workpiece surfaces and surface roughnesses with constant stock removal
- Special coat for hand-held machines

## Wear pattern of the grain

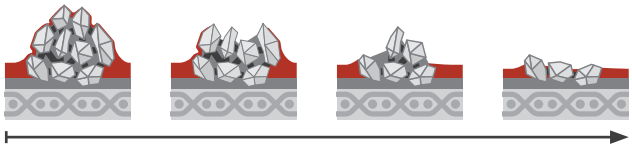


**VSM COMPACTGRAIN** series are completely made of granules which consist of numerous abrasive grains. The used grains are torn out by the cutting forces involved whereby unused grain tips are being exposed.

**VSM · Vereinigte Schmirgel- und Maschinen-Fabriken AG**
Siegmundstraße 17 · 30165 Hanover · Germany
T +49 511 3526 479 · F +49 511 3521 315
sales@vsmabrasives.com · **www.vsmabrasives.com**

MADE IN GERMANY

[1)] P = Categorised according to the FEPA standard. Further grit sizes upon request. Subject to technical changes.

P/KK772K/04.WW/07.26/en/1